

Simply the most powerful swimming pool sanitation system!

TrioPure™



The DEL Ozone TrioPure™ sanitation system revolutionizes the swimming pool

industry by combining two proven technologies, salt chlorine & ozone, into one powerful swimming pool sanitizing system. This unique synergistic combination of technologies provides additional benefits to you, the pool homeowner, compared to other systems:

- Increased Water Quality
- Low Maintenance
- Inexpensive Salt Cell Replacement Cost
- 24-hr Automatic Operation


The Real Power of TrioPure™

The TrioPure™ combines Ozone (the most powerful pool oxidizer/sanitizer) and salt water electrolysis (which creates chlorine from salt) to form super oxides at the point of mixture. This process, called the Advanced Oxidation Process (AOP) further sanitizes and destroys microorganisms in your swimming pool water and it can only be found on the patent pending and ETL certified TrioPure™.

Why the TrioPure™ is the Best Sanitation System for Your Swimming Pool.

- Creates healthy & clear pool water by integrating Salt & Ozone sanitation into one system
- Ozone kills all known bacteria & viruses that chlorine alone cannot (i.e., Cryptosporidium, Giardia)
- Chlorine levels are reduced to 0.5 ppm
- Proprietary self-cleaning salt cell design (with advanced oxidation) allows for longer duration between cleanings
- Lowest salt cell replacement costs
- Quality & Reliability count. Our Ozone generators are installed in over 1,000,000 pools & spas worldwide and into commercial locations like the Beijing Aquarium, Walt Disney World and the San Diego Zoo
- **The TrioPure™ is priced similar to other salt systems but you get both technologies for the price of one**

TrioPure Installation

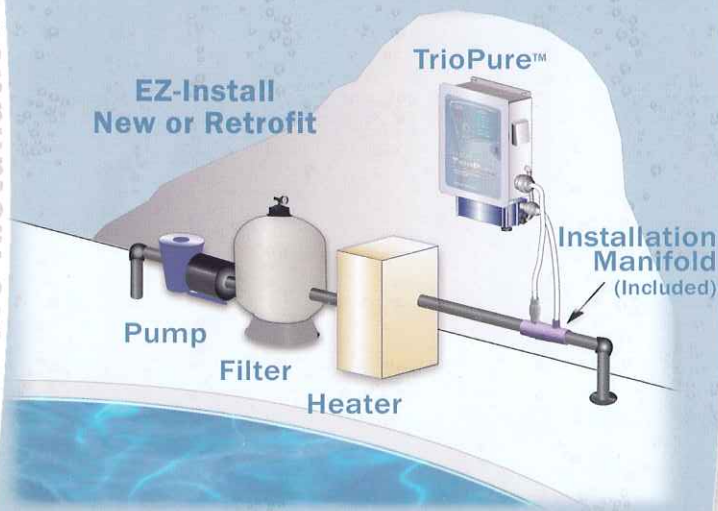

TrioPure Specifications

| | |
|-----------------------|--|
| Capacities | Trio-25 up to 25,000 gallons Trio-50 up to 50,000 gallons |
| Salt Level | 3500 ppm recommended |
| Ozone Output | Trio-25 (0.3 ppm) Trio-50 (0.6 ppm) |
| Free Chlorine | 0.5-1.0 ppm |
| Power | Trio-25/50 Dual Voltage - 120V 60Hz 4A or 240V 60Hz 2A |
| High Salt | 5000 ppm |
| Low Salt | 3000 ppm |
| Operating Temp. Range | 59-104 ° F |
| Dimensions | 15"W x 19.5"H x 7.5"D |
| Warranty | One year complete (prorated years 2 & 3) |
| Certification | ETL Certified to UL Standards |